Brass connectors with 9 mm passage capacity* for water, grease, air, oil etc.

developed specifically for coolants in plastic tools

Today Dyros 40 can be found everywhere: In short, Dyros can be found wherever

Safety connectors with internal thread


- on plastic moulds
- on compressed-air plants
- on oxygen and gas cylinders
- in operating rooms and in numerous other places

small dimensions, reliability and safety are a must.

All connectors have built-in valves that are perfectly tight even at very low pressure.

A locking device is automatically released upon engagement, so that the connector can be operated by one hand.



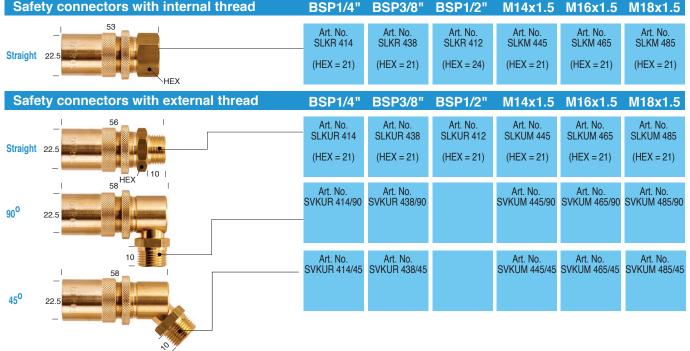



Dyros products are unimpeachable quality - down to the smallest detail

The Thread BSP corresponds to G1/4" - G3/8" - G1/2"

The connectors on these pages are also made without valve (OV).

Order e.g. with valve no. SLK 418 Without valve order no. SLK 418OV.

All connectors can also be delivered with coloured red and blue caps.

Order e.g. valve no. SLK 418R = red cap



