

Brass connectors with 9 mm passage capacity* for water, grease, air, oil etc.

- developed specifically for coolants in plastic tools


Today Dyros 90 can be found everywhere: In short, Dyros can be found wherever

- on plastic moulds
- on compressed-air plants
- on oxygen and gas cylinders
- in operating rooms and in numerous other places


In short, Dyros can be found wherever small dimensions, reliability and safety are a must.

All connectors have built-in valves that are perfectly tight even at very low pressure.

A locking device is automatically released upon engagement, so that the connector can be operated by one hand.

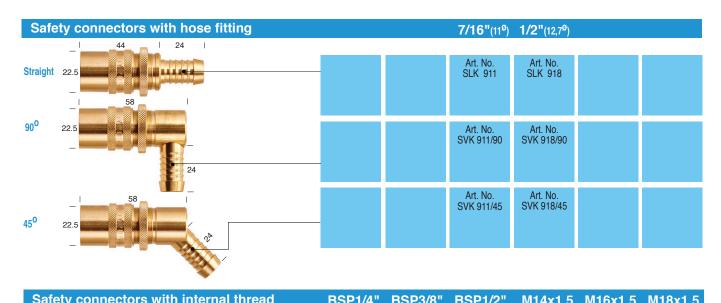

Salety Connectors with internal thread	D3F 1/4	D3F3/0	D3F 1/2	WIT4X 1.5	IN TOX 1.5	IN TOX 1.5
Straight 22.5	Art. No. SLKR 914 (HEX = 21)	Art. No. SLKR 938 (HEX = 21)	Art. No. SLKR 912 (HEX = 24)	Art. No. SLKM 945 (HEX = 21)	Art. No. SLKM 965 (HEX = 21)	Art. No. SLKM 985 (HEX = 21)
Safety connectors with external thread	BSP1/4"	BSP3/8"	BSP1/2"	M14x1.5	M16x1.5	M18x1.5
	Art. No. SLKUR 914	Art. No. SLKUR 938	Art. No. SLKUR 912	Art. No. SLKUM 945	Art. No. SLKUM 965	Art. No. SLKUM 985
Straight 22.5	(HEX = 21)					
90° 22.5	Art. No. SVKUR 914/90	Art. No. SVKUR 938/90		Art. No. SVKUM 945/90	Art. No. SVKUM 965/90	Art. No. SVKUM 985/90
450 22.5	Art. No. SVKUR 914/45	Art. No. SVKUR 938/45		Art. No. SVKUM 945/45	Art. No. SVKUM 965/45	Art. No. SVKUM 985/45



Dyros products are unimpeachable quality - down to the smallest detail

The Thread BSP corresponds to G1/4" - G3/8" - G1/2"

The connectors on these pages are also made without valve (OV).

Order e.g. with valve no. SLK 918 Without valve order no. SLK 918OV All connectors can also be delivered with coloured red and blue caps.

Order e.g. valve no. SLK 918R = red cap



